

Gas Type

Line Size

Flow Rate

Velocity

Pressure

Temperature

THERMAL DISPERSION

LEVEL / FLOW / INTERFACE

LEVEL / FLOW / INTERFACE

TG1/TG2
TA2
TD1/TD2






THERMATEL® THERMAL DISPERSION



MAGNETROL®

The Total Spectrum of Solutions ▶

Magnetrol® products employ many technologies to meet the challenges of level and flow control. Thermatel® switches and transmitters utilize the principles of thermal dispersion for accurate and reliable level, flow, and interface control.

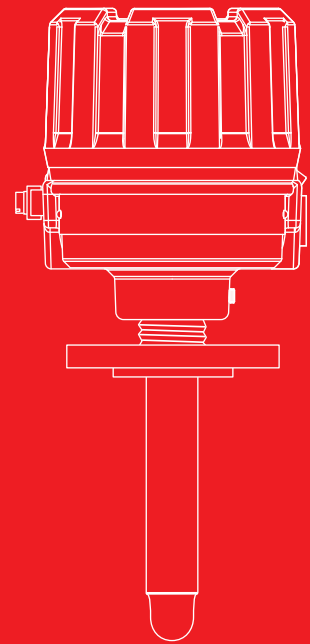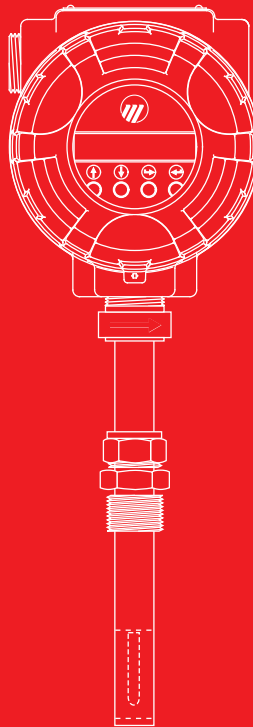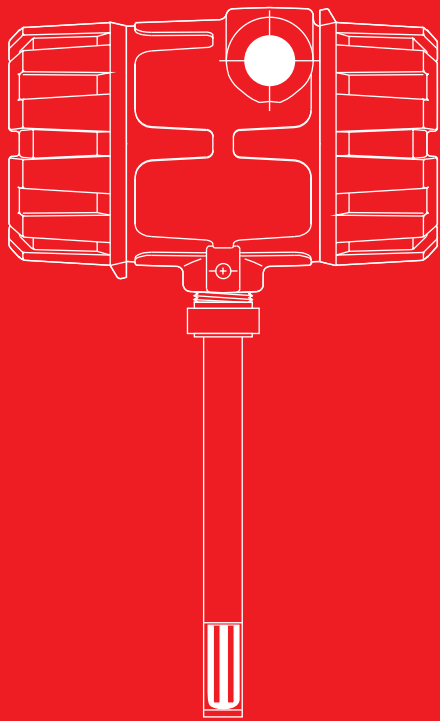

MAGNETROL®
THERMAL DISPERSION PRODUCTS



Magnetrol® International—a world leader in level and flow control technology—designs, manufactures, markets, and services level and flow instrumentation worldwide.

MAGNETROL product groups are based upon these technologies:

- Non-Contact Ultrasonic
- Buoyancy
- Contact Ultrasonic
- Guided Wave Radar
- Pulse Burst Radar
- RF Capacitance
- Thermal Dispersion
- Visual Indicators

The industries we serve include:

- Petroleum Production
- Petroleum Refining
- Power
- Petrochemical
- Chemical
- Water & Wastewater
- Pulp & Paper
- Food & Beverage
- Pharmaceutical

THERMATEL

THERMAL DISPERSION

C O N T E N T S

Thermal Dispersion Technology

- An Introduction to Thermatel® 4

Thermatel® Thermal Dispersion Products:

- TA2 Mass Flow Transmitters 6
- TD1 & TD2 Flow/Level/Interface Switches 8
- TG1 Level/Flow/Interface Switch 9
- Thermatel® Sensors 10
- Thermatel® 052-7201 Switch 11
- Thermatel® RPA Hot Tap Assembly 11


An Introduction To Thermatel® Technology & Products

Thermatel® products utilize thermal dispersion technology for unsurpassed accuracy and reliability in monitoring gas flow, liquid flow, liquid level, and interface. A market-proven technology, thermal dispersion has been in use by process industries for measurement and control purposes since the early 1960s.

Product Scope

The THERMATEL product line has been structured to provide customers with a complete range of options in thermal dispersion technology. Each THERMATEL product is engineered and manufactured to provide the highest reliability in even the most demanding process environments.

THERMATEL products range from single-point switches to the powerful TA2 Thermal Mass Flow Transmitter. The TA2 microprocessor-based electronics make these units the premier thermal dispersion mass flow meters in the industry. They are easy to set up, configure, and provide high levels of accuracy, repeatability, and diagnostics.

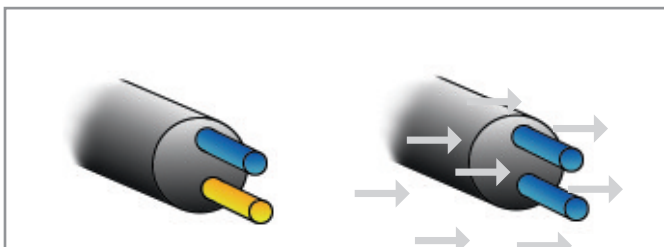

High Temperature Differential **Low Temperature Differential**

THERMATEL switches employ twin RTD sensors to sense process change in level and flow applications. One sensor measures the surrounding process temperature to provide a reference. The second sensor is self-heated to establish a temperature differential above the reference temperature. In level applications, the cooling effect of contacting media reduces the temperature difference between the RTDs. In flow applications, an increase in flow rate further decreases the temperature difference. In each instance, the decrease in temperature difference triggers a relay action.

Applications Range


THERMATEL products are in service worldwide in many of the most demanding applications. As a flow switch THERMATEL is used for gas and liquid applications for both flow and no/low flow detection. Typical applications involve pump protection, cooling air/water, relief valve monitoring, exhaust flows and lubrication systems. THERMATEL products provide outstanding low flow sensitivity with high rangeability.


THERMATEL level switches provide outstanding performance with liquids and slurries in a wide variety of demanding applications including interface, high viscosity, turbulence, high temperatures, high pressures, and presence of foam.

For mass flow measurement of air and gases, the THERMATEL TA2 Thermal Mass Flow Transmitter is without peer. The easy to use instrument is installed in numerous flow measurement applications including combustion air flow, compressed air/gas and aeration air flow measurement. Other common applications include natural gas, digester/bio gas, flare lines, hydrogen, oxygen, and many other gas flow measurement applications.

Principle of Operation: Switches

Flow and level detection is accomplished when THERMATEL sensing elements detect changes in the heat transfer characteristics of the process media. As a flow switch, THERMATEL switches will rapidly detect changes in liquid or gas flow rate by detecting heat transfer, which increases at higher flow rates. Level detection is accomplished by sensing changes in the thermal conductivity of media. THERMATEL switches can also be calibrated to sense difference in heat transfer at the interface between two dissimilar media, such as oil/water, or water/foam.

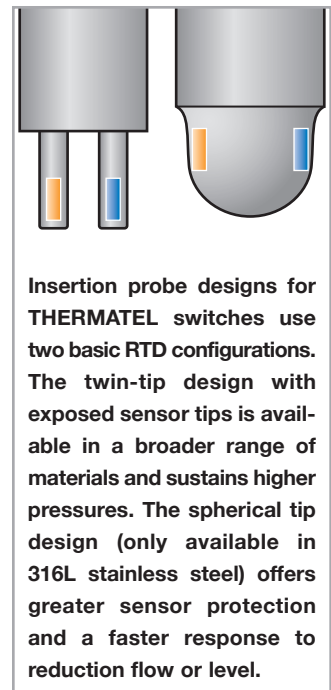

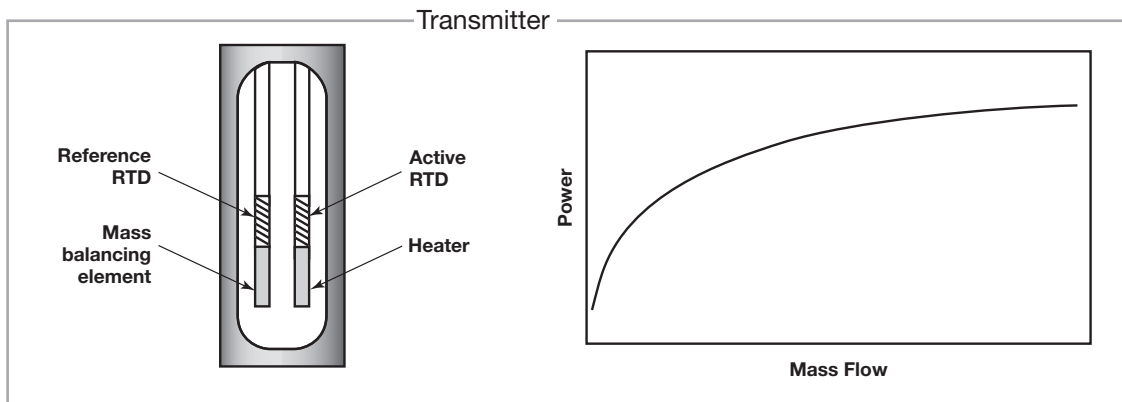

THERMATEL switches rely on two miniature sensing elements to detect heat transfer. Resistance Temperature Detectors (RTDs) establish a thermal relationship that establishes the basis for flow and level detection. One RTD measures the temperature of the surrounding media which serves as the instrument's reference temperature. The second RTD is heated to establish a temperature differential above the reference temperature. In flow sensing applications, the heated RTD cools with increasing flow. In level sensing applications, the RTD cools in the presence of media. In each case, cooling the heated RTD decreases the differential temperature between the two RTDs. This decrease is then converted into a relay actuation which performs an alarm function.

Principle of Operation: Flow Meter

Thermal dispersion technology provides a mass flow measurement of air or gas. This is accomplished by precisely measuring the cooling effect as the mass (molecular) flow passes the heated sensor. The sensor consists of two elements: the reference which measures the temperature of the gas and a second element which is heated at a variable power. This maintains the desired temperature difference between the two sensors.

The above illustration shows the amount of power required to maintain a constant temperature difference between the two sensors. Under low mass flow conditions, there is minimal cooling and little power is required. As the mass flow increases, more power is required. This provides excellent low flow sensitivity and high turndown capabilities.

Each instrument is factory calibrated and configured for the specific application. If necessary, the TA2 can be reconfigured in the field for different conditions.

Strengths + and Cautions -

- ✚ Direct mass flow measurement—does not require pressure or temperature compensation which is required by other technologies.
- ✚ THERMATEL offers excellent low flow sensitivity.
- ✚ THERMATEL products are easy to install and can be “hot tapped.”

An alternative flow meter technology should be considered where condensed moisture is continuously present.

THERMATEL TA2 Thermal Mass Flow Transmitter

Mass Flow Measurement of Air and Gas

General Description: The MAGNETROL TA2 Thermal Dispersion Mass Flow Transmitter provides direct mass flow measurement of air and gases. The powerful micro-processor-based electronics provide an instrument that is easy to configure to the application, yet provides flexibility and ease of use. Field calibration verifications, advanced diagnostics, and simplified installation allow this technology to be extremely cost competitive.

- Technology Features:**
- ▶ Direct mass flow measurement
 - ▶ Excellent low flow sensitivity
 - ▶ High turndown ratios
 - ▶ Calibration verification in the field
 - ▶ Ease of installation
 - ▶ Low pressure drop

Applications: Typical applications include combustion air-flow measurement, compressed air, natural gas flow, flare lines, digester/bio gas, and other process gas flow measurement.



**Model TA2
Mass Flow Transmitter
with Insertion Probe**



In **The MAGNETROL Product Calibration Lab**, THERMATEL products are calibrated and tested to meet customer specifications. Calibrations traceable to NIST and ISO 17025.



**Model TA2
Mass Flow Transmitter
with Flow Body**

THERMATEL TA2

Product Features:

- ▶ Accepts all VDC or VAC input voltages
- ▶ Second mA output for temperature output or second flow range optional
- ▶ Pulse output optional
- ▶ Integral or remote electronics
- ▶ Rotatable housing to permit viewing the display from any position
- ▶ Pre-calibrated and configured for the user's application. Ready to install.
- ▶ Flow totalization
- ▶ Stainless steel and Hastelloy probes with wide selection of process connections
- ▶ All explosion proof housing with FM, FMc, ATEX and IEC hazardous area approval
- ▶ Insertion probes and flow body designs
- ▶ Ability to replace probe/circuit boards in field
- ▶ PACTware™ for configuration, diagnostics, and trending
- ▶ SIL 1 with SFF value of 88%
- ▶ NIST traceable calibration and ISO 17025
- ▶ Optional hot tap assembly
- ▶ HART®, AMS communication, FOUNDATION fieldbus
- ▶ 4-button keypad for data entry
- ▶ Two gas calibrations available
- ▶ Auto switching feature for extreme turndown



APPROVALS



IEC

EAC

KGS

CCOE



SPECIFICATIONS

Supply Voltage	15 to 30 VDC (consult factory for lower) 100 to 264 VAC
Power Consumption	DC 9W max, AC 20VA max
Flow Range Maximum	10–54,000 SFPM (0.05–275 Nm/s) air reference to standard conditions
Accuracy Flow	±1% of reading +0.5% of calibrated full scale
Accuracy Temperature	±2° F (1° C)
Repeatability	±0.5% of reading
Turn Down	100:1 typical (depending on calibrated flow range)
Ambient Temperature	-40° to +176° F (-40° to +80° C); display not readable below -22° F (-30° C)
Process Temperature	-50° to +400° F (-45° to +204° C)
Pressure Rating	1500 psig (103 bar) maximum
Analog Output Signal	
	Active: 4–20 mA (isolated) maximum 1000 Ω loop resistance
	Passive: 4–20 mA (isolated) loop resistance dependent on power supply
HART, FOUNDATION fieldbus™	Optional

THERMATEL TD1 & TD2 Switches

Flow / Level / Interface Detection


General Description: The TD1/TD2 THERMATEL switch is extremely versatile providing flow/level/interface detection in a single unit. Both liquid and gas flow detection is obtainable. The TD1 is available with 24 VDC power with the TD2 available in either an AC or DC version. The TD2 also provides LED indication through an optional glass window, mA output for diagnostics or repeatable flow/level indication, optional hermetically sealed relay, time delay adjustment, and remote electronics. Continuous diagnostics on both units provides assurance that the switch is operating properly.

- Features:**
- ▶ Continuous diagnostics through microprocessor based electronics
 - ▶ Temperature compensation
 - ▶ No moving parts
 - ▶ Narrow hysteresis
 - ▶ Operating temperatures to +850° F (+450° C)
 - ▶ Integral or remote electronics
 - ▶ 8-amp DPDT relay with optional hermetically sealed relay
 - ▶ Low flow sensing capabilities
 - ▶ Probes available in 316 stainless steel, Hastelloy® C, and Monel®
 - ▶ Wide selection of sensors – see page 10
 - ▶ Unique spherical tip probe prevents plugging
 - ▶ NACE construction available
 - ▶ Hygienic design available

- Applications:**
- Flow:** Pump protection, relief valve monitoring, low flow/high flow indication, cooling air/water, exhaust flow, analyzer lines, lubrication systems
- Level:** High level/low level/interface detection, high viscosity liquids, slurries, high pressure, high temperature, air/foam and foam/liquid detection, corrosive environments



APPROVALS



IEC EAC

KGS CCOE



SPECIFICATIONS

Input Power	TD1: 19.2 to 28.8 VDC
	TD2: 100 to 264 VAC, 50–60 Hz or 19.2 to 28.8 VDC
Power Consumption	TD1: 3.5 watts at 24 VDC, 4.5 watts at 30 VDC
	TD2: 4 watts at 24 VDC, 4.5 watts at 30 VDC, 5 watts at 100 to 264 VAC
Power to Probe	Less than 1 watt
Electronics	TD1: Integral
	TD2: Integral or remote
Relay	8-amp DPDT — TD2 has optional hermetically sealed relay
Set Point Range	Water: 0.01 to 5 FPS (0.003 to 1.5 m/s)
	Air: 0.1 to 500 SFPS (0.3 to 150 Nm/s)
Process Temperature	-100° to +850° F (-73° to +454° C)
Process Pressure	Probe dependent — to 6000 psig (414 bar)

THERMATEL TG1 Switch

Two-Wire Intrinsically Safe Flow / Level / Interface Detection

General Description: The MAGNETROL TG1/TG2 switch is the industry's only two-wire, intrinsically-safe thermal dispersion switch. The switch consists of a probe and preamplifier with remote DIN rail electronics. Barriers in the DIN rail enclosure provide a two-wire, intrinsically-safe circuit to the probe/preamplifier.

Product Operation: The preamplifier converts the temperature difference to a pulse signal which is super-imposed on the two wires providing power to the sensor. The DIN rail electronics provide operation control including set point adjustment, LED indication of flow/level, relay, fail-safe adjustment, and time delay. A non-linear mA output signal is available for diagnostics and repeatable flow/level indication.

- Features:**
- ▶ DIN rail mounted electronics with built-in barrier provide a two-wire intrinsically-safe circuit to the probe/preamplifier
 - ▶ Versatile switch for flow and level
 - ▶ Set point adjustment at remote electronics
 - ▶ Up to 1,650 feet (500 meters) cable length
 - ▶ LED indication provides monitoring of actual flow/level
 - ▶ mA output signal will provide repeatable indication plus can be used for diagnostics
 - ▶ Uses all THERMATEL probes including low flow body and high-temperature sensor

- Applications:**
- Flow:** Liquid or gas flow, pump protection, cooling air/water, relief valves, flow/no flow
 - Level:** Hi/Low level, high viscosity media, high solids content, aeration/foaming, hygienic applications, interface detection, high-temperature applications



APPROVALS



SPECIFICATIONS

Supply Voltage	24 VDC
Relay	2-amp, SPDT relay
Signal	mA output, non-linear
Fail-safe	Switch selectable
LED Indication	
4 Green:	Flow/Level is normal
1 Yellow:	Flow/Level is near set point
1 Red:	Alarm condition (TG1 only)
Set-Point	Adjustable via potentiometer

Operating Temperature	
Sensor:	-100 to +850 °F (-70 to +450 °C)
Flow Range Insertion Probes	
Water:	0.01 – 5 FPS (0.003 to 1.5 m/s)
Air:	0.1 – 500 SFPS (150 Nm/s)

THERMATEL Switch Sensors

Twin-Tip Sensors are mounted at the end of each tip. **Spherical Sensors** are bonded directly to the wall of the tip for greater sensitivity and sensor protection.

Probe pressure and temperature ratings are dependent upon process connection; maximum pressure and temperature ratings are shown below.

Twin-Tip Sensor

General Use:	General purpose and corrosive resistant applications
Material Options:	316 stainless steel, Hastelloy C-276, or Monel
Process Connections:	NPT threads, G threads, ANSI flanges, EN/DIN flanges
Max Temperature:	+400 °F (+204 °C)
Max Pressure:	3,000 psig (206 bar) maximum
Insertion Lengths:	2 to 130 inches (50 to 3,300 mm)



Spherical-Tip Sensor

General Use:	General purpose service and high-viscosity applications
Material:	316 stainless steel
Process Connections:	NPT threads, G threads, ANSI flanges, EN/DIN flanges, hygienic
Max Temperature:	+400 °F (+204 °C)
Max Pressure:	600 psig (41 bar) maximum
Insertion Lengths:	2 to 130 inches (50 to 3,300 mm)



High-Temperature/High Pressure Sensor

General Use:	For high-temperature or high pressure process environments
Material:	316 stainless steel, Hastelloy C-276
Process Connections:	NPT threads, G threads, ANSI flanges, EN/DIN flanges
Max Temperature:	+850 °F (+454 °C)
Max Pressure:	6,000 psig (413 bar)
Insertion Lengths:	2 to 36 inches (50 to 900 mm)



Low Flow Body Sensor



General Use:	Low flow detection; suitable for chemical feed pumps, additive flow, pump seals, process analyzers
Material:	316 stainless steel
Process Connections:	¼" and ½" NPT, and G threads
Max Temperature:	+400 °F (+204 °C)
Max Pressure:	7,500 psig (517 bar)

Mini Sensor

General Use:	Probes specifically designed to fit into a ½", ¾", or 1" Tee
Material:	316 stainless steel
Max Temperature:	+400 °F (+204 °C)
Max Pressure:	3,000 psig (206 bar) maximum
Insertion Length:	1 to 130 inches (25 to 3,300 mm)



THERMATEL 052-7201 Switch

Flow Switch for Naval Applications

General Description:

The THERMATEL "Navy Switch" is a special version of the THERMATEL switch. It is used by the United States Navy for use on board Naval ships for flow detection in sprinkler systems.

Features:

- ▲ Meets MIL-S-901D: Grade A shock requirements
- ▲ Meets MIL-STD-167-1: Vibration requirements
- ▲ Unit comes with Tee for use with MIL-T-16420 CUNI tubing (For tubing sizes: 1.25", 1.50", 2.00", 2.50", 3.00" or 4.00")
- ▲ 120 VAC power
- ▲ 10 amp DPDT relay
- ▲ Calibrated for sprinkler systems to detect flow of 10 GPM with 10-second delay time



THERMATEL RPA Hot Tap Assembly

Allows probe installation or removal without process shut-down

General Description:

When used with THERMATEL insertion probes, the Retractable Probe Assembly (RPA) permits the probe to be installed or removed from the vessel or pipe while the process remains in operation. Once installed, it is not necessary to drain or depressurize a tank or shut down the operation in order to install or remove a THERMATEL instrument.

Features:

- ▲ Standard 316 stainless steel gland construction
- ▲ Carbon steel or stainless steel process connections
- ▲ Flange and ball valve available as an option
- ▲ 1½" NPT or flange connection
- ▲ Teflon® compression rings

Capabilities:

- ▲ Temperatures to +400 °F (+204 °C)
- ▲ Standard pressure to 50 psig (3.4 bar) (80 psig (5.5 bar) for TA2)
- ▲ High-pressure design option to Class 300 pound service



THERMATEL Hot Tap Assemblies:
Standard Design (Left) and
High Pressure Design (Right)



MAGNETROL®

CORPORATE HEADQUARTERS

705 Enterprise Street • Aurora, Illinois 60504-8149 USA • Phone: 630-969-4000
magnetrol.com • info@magnetrol.com

EUROPEAN HEADQUARTERS

Heikensstraat 6 • 9240 Zele, Belgium • Phone: 052 45.11.11

Magnetrol & Magnetrol logotype and Thermat are registered trademarks of Magnetrol International, Incorporated.

Copyright © 2019 Magnetrol International, Incorporated
Bulletin: 54-100.5 • Effective: June 2016 • Supersedes: March 2011